

# HELLO KITTY<sup>®</sup> REMOTE CONTROL CAR

Keep these instructions for future reference: they contain important information.

**IMPORTANT: Please read all "Consumer Information" before operating your vehicle.**

**ADULT SUPERVISION REQUIRED.**

Surfaces may become hot and cause burns if electronics get wet. Do not operate vehicle through water or snow.

## Consumer Information:

**Note to Adults:** to ensure that the child's play is both safe and fun, please review all operating instructions and safety rules with your child.

## CONTENTS

- Figure x 1
- Vehicle x 1
- Transmitter Controller x 1
- Paper Road Sign x 2
- Try Me Battery x 2 (Must replace with 2 X AA alkaline battery to operate the vehicle.)

## Safety Tips

- NEVER drive your vehicle on streets! They're for real cars!
- DO NOT pick up vehicle while in motion.
- Avoid collisions with wall or hard surfaces.
- Keep fingers, hair and loose clothing away from tires and the wheel hubs while the vehicle is switched ON.
- Adult supervision is recommended when this vehicle is being operated.
- To avoid accidental operation, remove all batteries when not in use.
- Be sure to rest your vehicle for at least 5 minutes after every 15 minutes of operation.
- Please avoid unintended play with electric wire (soft antenna), as it may defect product or result in strangulation.

## BEFORE BATTERY INSTALLATION

Your new R/C is designed to work with standard 3 (three) "AA" alkaline batteries, sold separately. Controller is designed to work with standard 2 (two) "AA" alkaline batteries, sold separately.

## INSTALLING BATTERIES IN THE R/C (Diagram 1)

- 3 (three) "AA" alkaline batteries (Not included)
1. Push the ON/OFF to "OFF" position on vehicle.
  2. Remove battery cover (Use a Phillips screwdriver to remove screw - Not Included) and unclip.
  3. Remove the used batteries (if any).
  4. Insert the 3 "AA" alkaline batteries, with polarity (+/-) as shown inside battery compartment.
  5. Snap the battery compartment door back into place and replace screw.

## INSTALLING BATTERIES IN THE CONTROLLER (Diagram 2)

- 2 (two) "AA" alkaline batteries (Not included)
1. Push the ON/OFF to "OFF" position on controller.
  2. Remove battery cover (Use a Phillips screwdriver to remove screw - Not Included) and unclip.
  3. Remove the used batteries (if any).
  4. Insert the 2 "AA" alkaline batteries, with polarity (+/-) as shown inside battery compartment.
  5. Snap the battery compartment door back into place and replace screw.

## Battery Safety Information

- Insure that battery polarity is correct.
- Use only batteries of the type recommended (or equivalent).
- Do not mix old and new batteries.
- Do not mix alkaline, standard (carbon-zinc), or rechargeable (nickel-cadmium) batteries.
- Remove used-up batteries immediately. Remove batteries if vehicle will not be used for a long period of time to prevent possible leakage.
- Do not recharge non-rechargeable batteries.
- Do not short-circuit terminals.
- Dispose of batteries safely. Do not dispose of batteries (or products containing non-replaceable batteries) in fire, as batteries may explode or leak.

## QUICK TIPS

- When your vehicle starts to lose power, it may lose functions or performance. It's time for fresh batteries (or a recharge). Your vehicle's running time may change depending on your driving style.
- Radio interference can make your vehicle run badly. Interference can be caused by other R/C vehicles running on the same frequency; electrical wires, large buildings; or CB radios. Try to stay away from these!
- Point your transmitter controller antenna up – not down toward your vehicle. If your vehicle gets too far away, it won't work properly.
- Don't drive your vehicle in sand or through water or snow.
- Don't store your vehicle near heat or in direct sunlight. Always turn switches OFF and remove all batteries for storage.
- If the vehicle resets automatically, the batteries are weak and need to be changed.

## Cleaning instruction:

To clean, wipe excess dirt from toy. Remove batteries first. Wipe toy clean with wet cloth using plain water. Wipe dry. DO NOT IMMERSE IN WATER and DO NOT CLEAN VEHICLE WITH ANY CHEMICALS. Let the toy completely dry up before putting batteries back into clean, dry battery compartment.

## BOTTOM OF VEHICLE

To install batteries, remove battery cover (Use a Phillips screwdriver to remove screw - Not Included) and unclip. Insert new batteries as shown.

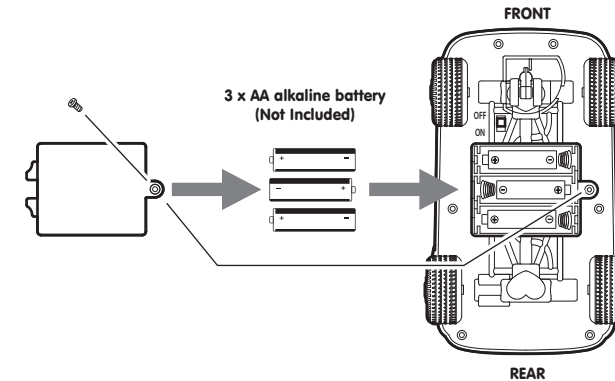


DIAGRAM 1

## BOTTOM OF TRANSMITTER CONTROLLER

2 x AA alkaline battery (Not Included)


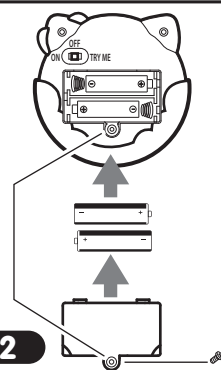


DIAGRAM 2


## Operations Tips:

Car: ON / OFF switch located on the bottom of the car.  
Transmitter: ON / OFF switch located on the bottom of the transmitter.  
When you ready to run, please make sure push the ON / OFF switches to "ON" position on both.  
Go to get fun.

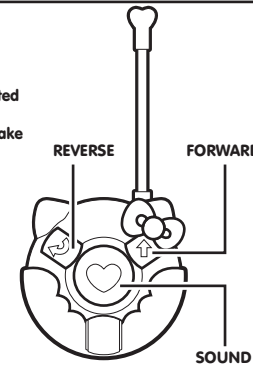

## DIAGRAM 3

Set up the road sign

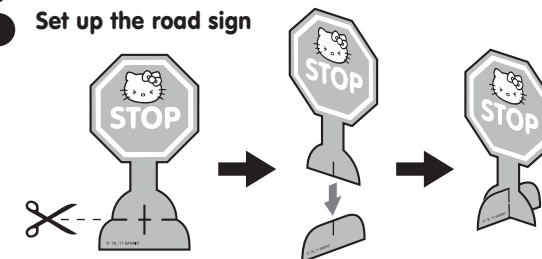

We reserve the right to improve or amend color product content specifications. Colors may vary. Jada oval mark is a registered trademark of Jada Toys, Inc.

F84074-0000-ISH-EN02A



**WARNING:**  
CHOKING HAZARD - Small parts.  
Not for children under 3 years.

Used Under License.  
www.sanrio.com